

Project:


# Tik-Tak LED Chandelier Spec Sheet

SKU: 2806.25

LED rods are suspended in tandem pairs on multiple levels, perpendicular to each other. Each rod can be independently positioned as up or down light, and adjusted with infinite variability to any height along the suspension cables. Dramatic in the precision of their orientation and range of verticality, Tik-Tak brings a crisp presence to the volume of space.

Learn more: <https://sonnemanlight.com/tik-tak-led-chandelier>

Type #:

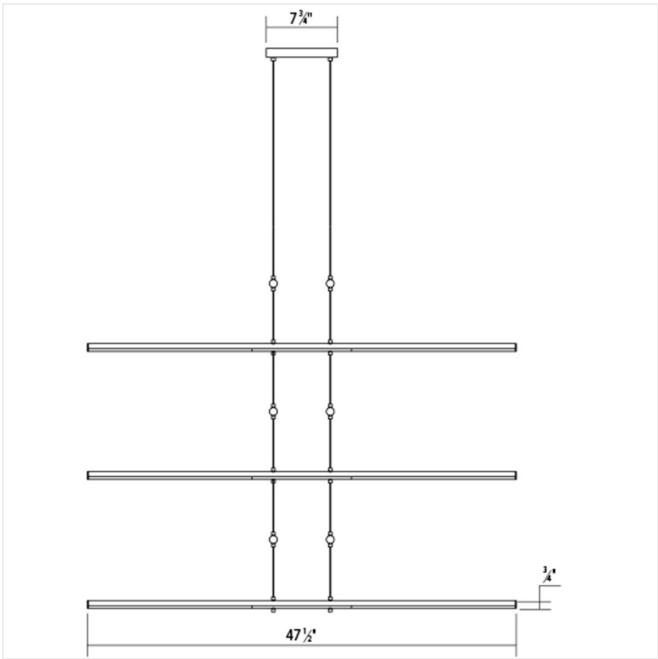

## Dimensions

Height:	0.75"
Width:	47.5"
Length:	47.5"
Size:	Stack 6-Tier
Canopy/Backplate/Base Width:	7.75"
Canopy/Backplate/Base Depth:	7.75"
Canopy/Backplate/Base Height:	1"

## Electrical Specs

Bulb(s) Included?:	Yes
Bulb 1 Type:	Integral LED
Bulb Quantity:	24
Input Voltage:	100-277VAC
Wattage:	123
Initial Lumens:	13640
Delivered Lumens:	7500
Kelvin:	3000K
CRI:	90
Power Supply Type:	Driver
Power Supply Quantity:	1
Power Supply Location:	Remote
Dimming Type:	0-10V
Bulb Max Wattage:	123

## Installation

Installation:	Licensed electrician required
Sloped Ceiling Compatible?:	Compatible up to 45°
Minimum Hanging Height:	9.25"
Maximum Hanging Height:	121.5"

## Shade

Shade Material:	Optical Acrylic
-----------------	-----------------

## General Listings

Features:	At NYDC
Certification:	C-ETL-US
Color/Finish:	Satin Black (.25)

## Available Finishes

Available Finishes:	Polished Chrome (.01), Satin Black (.25), Satin Nickel (.13), Satin White (.03)
---------------------	---

## Available Color Temperatures

Available Color Temperatures:	3000k
-------------------------------	-------

## Options In This Family

SKU	Size	Wattage	CRI	Delivered Lumens
2801.XX	Tandem	20	90	1250
2802.XX	Stack 2-Tier	41	90	2500
2803.XX	Stack 3-Tier	61	90	3750
2804.XX	Stack 4-Tier	82	90	5000
2805.XX	Stack 5-Tier	102	90	6250
2806.XX	Stack 6-Tier	123	90	7500