

Project:



Thin-Line LED Wall Bar Spec Sheet

SKU: 2810.03-6

A system of minimally scaled LED uplight/downlight wall bars, indirect light wall bars, and pendants. Thin-Line is offered in a variety of lengths, finishes, and lighting configurations. One-sided configurations direct light in a single direction, and can be mounted in an uplight or downlight orientation. Two-sided configurations direct light both up and down.

Learn more: <https://sonnemanlight.com/thin-line-led-wall-bar>

Type #:

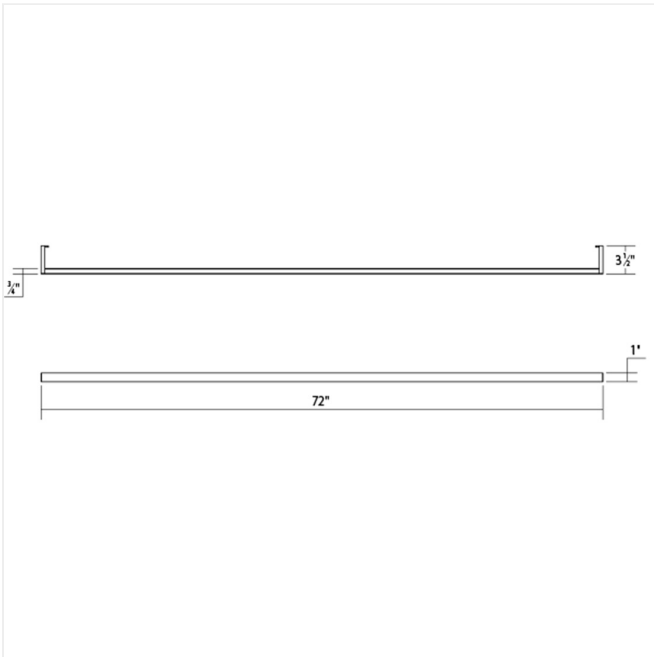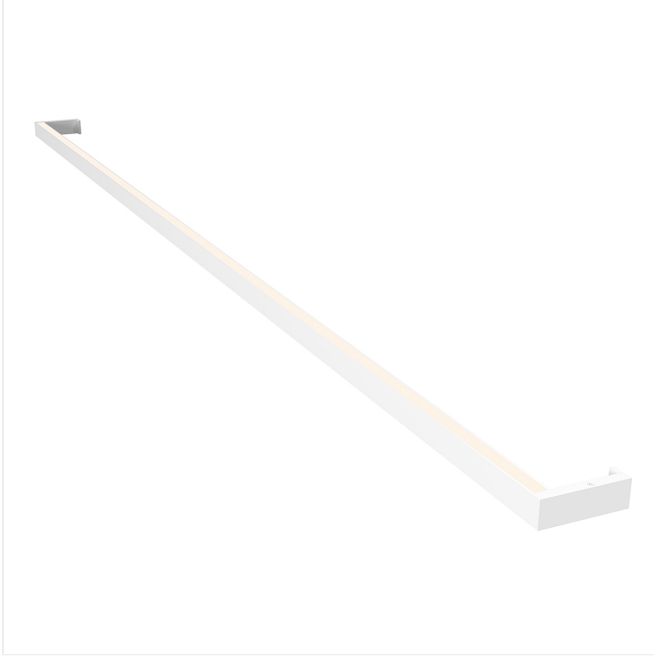

Dimensions

| | |
|-------------------------------|--------------|
| Height: | 1" |
| Width: | 72" |
| Extends: | 3.5" |
| Minimum Extension: | 3.5" |
| Maximum Extension: | 3.5" |
| Size: | 6' One-Sided |
| Canopy/Backplate/Base Width: | 1" |
| Canopy/Backplate/Base Height: | 1" |

Electrical Specs

| | |
|------------------------|--------------|
| Bulb(s) Included?: | Yes |
| Bulb 1 Type: | Integral LED |
| Bulb Quantity: | 1 |
| Input Voltage: | 120VAC |
| Wattage: | 36 |
| Initial Lumens: | 2220 |
| Delivered Lumens: | 1350 |
| Kelvin: | 3000K |
| CRI: | 90 |
| Power Supply Type: | Driver |
| Power Supply Quantity: | 1 |
| Power Supply Location: | Remote |
| Dimming Type: | TRIAC/ELV |
| Bulb Max Wattage: | 36 |

Installation

| | |
|-----------------------------|-------------------------------|
| Installation: | Licensed electrician required |
| Sloped Ceiling Compatible?: | Adapter Available up to 45° |
| Installation Orientation: | Any Orientation |

Shipping

| | |
|------------------------|---------------|
| Carton 1 L x W x H: | 75" X 7" X 4" |
| Carton 1 Gross Weight: | 6 LBS |

Shade

| | |
|-----------------|----------------------------|
| Shade Material: | Aluminum w/Optical Acrylic |
|-----------------|----------------------------|

General Listings

| | |
|----------------|-------------------|
| Features: | Damp Rated |
| Certification: | C-ETL-US |
| Color/Finish: | Satin White (.03) |

Available Finishes

| | |
|---------------------|---|
| Available Finishes: | Bright Satin Aluminum (.16), Satin Black (.25), Satin White (.03) |
|---------------------|---|

Available Color Temperatures

| | |
|-------------------------------|---------------------|
| Available Color Temperatures: | 2700K, 3000K, 3500K |
|-------------------------------|---------------------|