

Project:

Vines LED Chandelier Spec Sheet

SKU: 3281.03



Organically sweeping curves undulate in flowing vine-like configurations on which illuminated glass seedpods extend from the softly intersecting branches. Available in several configurations as well as custom sizes, Vines can be suspended singularly or in clusters to scale into dramatically large sweeping installations of extraordinary sculptural presence.

The glass pods have crushed glass interior surfaces that refract and reflect the LED light at infinite angles producing a luminous radiance from within the smoothly tapered pods.

Also available as a [Semi-Flush Mount](#).

Learn more: <https://sonnemanlight.com/vines-led-chandelier>

Type #:

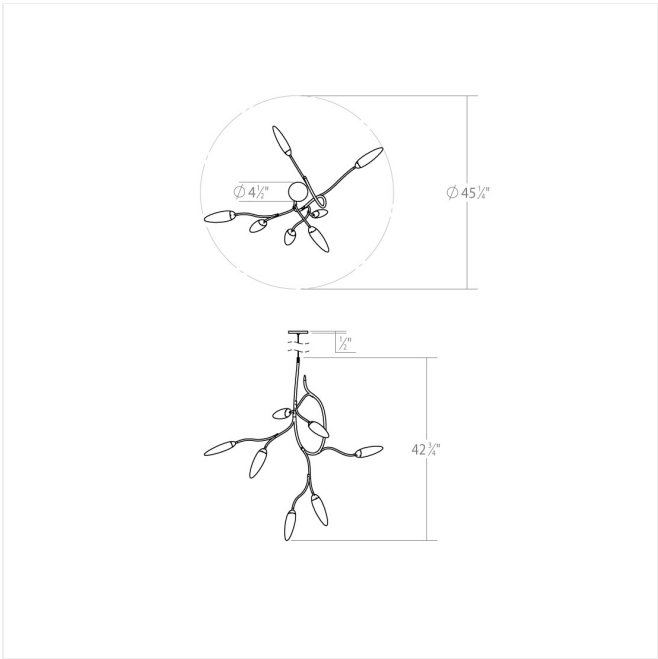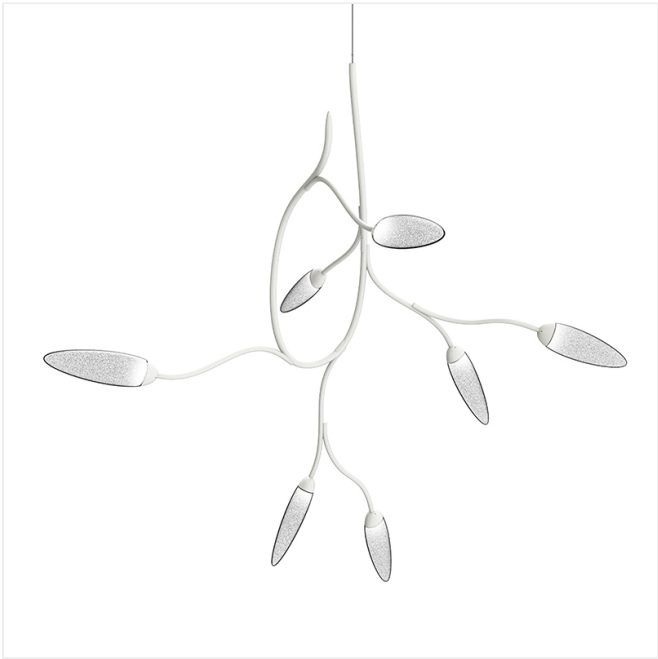

Dimensions

Height:	48"
Width:	38.25"
Length:	26.75"
Canopy/Backplate/Base:	5"
Hanging Details:	6' Adjustable Cord/Cable
Size:	Small
Canopy/Backplate/Base Height:	2"

Electrical Specs

Bulb(s) Included?:	Yes
Bulb 1 Type:	Integral LED
Bulb Quantity:	7
Input Voltage:	120VAC
Wattage:	7
Initial Lumens:	800
Delivered Lumens:	560
Kelvin:	3000K
CRI:	90
Power Supply Type:	Driver
Power Supply Quantity:	1
Power Supply Location:	Outlet Box
Dimming Type:	TRIAC/ELV/0-10V
Bulb Max Wattage:	7

Installation

Installation:	Licensed electrician required
Sloped Ceiling Compatible?:	Not Compatible
Cord Length:	6 ft
Minimum Hanging Height:	49"
Maximum Hanging Height:	121"

Shipping

Carton 1 L x W x H:	33" X 33" X 22"
Carton 1 Gross Weight:	19 LBS

Shade

Shade Material:	White Crushed Glass
-----------------	---------------------

General Listings

Features:	Damp Rated
Certification:	C-ETL-US
Color/Finish:	Satin White (.03)

Available Finishes

Available Finishes:	Coffee Bronze (.27), Satin Black (.25), Satin White (.03)
---------------------	---

Available Color Temperatures

Available Color Temperatures:	3000k
-------------------------------	-------

Options In This Family

SKU	Size	Wattage	CRI	Delivered Lumens
3285.XX	Large	26	90	2050
3285.XX-J20	Large	26	90	2050
3283.XX	Standard	14	90	1100
3283.XX-J20	Standard	14	90	1100