

Project:

# Keel LED Pendant Spec Sheet


SKU: 3828.03

A classically Minimalist approach to functionality with its architectural sleekness. Keel Pendant offers a modern yet minimal presence that is functional for any interior design.

In addition to this Pendant, Keel is also available as a [Bath Bar](#), a free-standing [Floor Lamp](#), and wall-mounted as a [Wall Lamp](#). These crisply intersecting forms bring multiple lighting applications to the task with architectural precision and can be used throughout a project for a sense of continuity from space to space.

Learn more: <https://sonnemanlight.com/keel-led-pendant>

Type #:

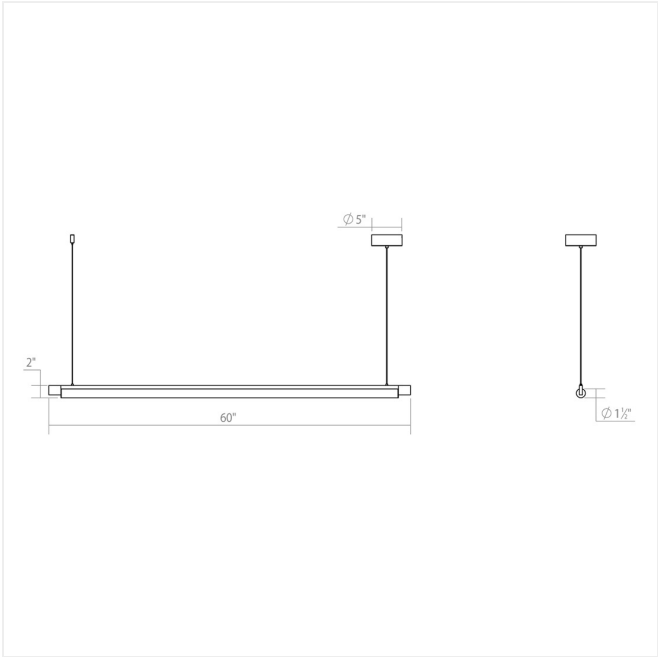

## Dimensions

Height:	2"
Width:	60"
Length:	1.5"
Canopy/Backplate/Base:	5"
Hanging Details:	6' Adjustable Cord/Cable
Size:	60"
Canopy/Backplate/Base Height:	2"

## Electrical Specs

Bulb(s) Included?:	Yes
Bulb 1 Type:	Integral LED
Bulb Quantity:	1
Input Voltage:	120-277VAC
Wattage:	29
Initial Lumens:	3410
Delivered Lumens:	2400
Kelvin:	3000K
CRI:	90
Power Supply Type:	Driver
Power Supply Quantity:	1
Power Supply Location:	Canopy
Dimming Type:	TRIAC/ELV/0-10V
Bulb Max Wattage:	29

## Installation

Installation:	Licensed electrician required
Sloped Ceiling Compatible?:	Adapter Available up to 45°
Cord Length:	6 ft
Minimum Hanging Height:	5"
Maximum Hanging Height:	77"

## Shipping

Carton 1 L x W x H:	67" X 6" X 6"
Carton 1 Gross Weight:	6 LBS

## Shade

Shade Material:	Optical Acrylic
-----------------	-----------------

## Available Sizes

Available Sizes:	44", 60"
------------------	----------

## General Listings

Features:	Damp Rated
Certification:	C-ETL-US
Color/Finish:	Satin White (.03)

## Available Finishes

Available Finishes:	Bright Satin Aluminum (.16), Satin Black (.25), Satin White (.03)
---------------------	---

## Available Color Temperatures

Available Color Temperatures:	3000K, 3500K
-------------------------------	--------------

## Options In This Family

SKU	Size	Wattage	CRI	Delivered Lumens
3826.XX	44"	22	90	1800
3826.XX-J20	44"	22	90	1800
3826.XX-35	44"	22	90	2020
3828.XX	60"	29	90	2400
3828.XX-J20	60"	29	90	2400
3828.XX-35	60"	29	90	2660