



Project:

REALS Downlight LED
Sconce

SKU: 7300.DC.DL.98-WL

Consider the possibilities of the nearly unlimited opportunities to configure REALS sconces, with lenses and caps, for a variety of LED illuminating possibilities. Also available as a [Up/Down Sconce](#), [Surface Mount](#), [Bollard](#), and [Double Bollard](#).

Learn more: <https://sonnemanlight.com/realS-downlight-led-sconce>

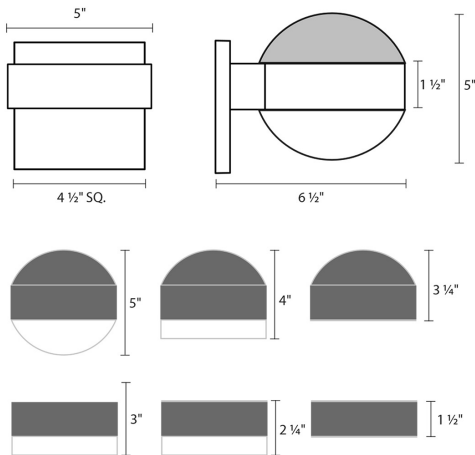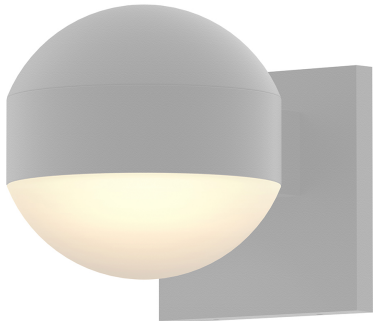

Dimensions

Height	5"
Width	5"
Extends	6.5"
Minimum Extension	6.5"
Maximum Extension	6.5"
Canopy/Backplate/Base Width	4.5"
Canopy/Backplate/Base Depth	0.5"
Canopy/Backplate/Base Height	4.5"

Electrical Specs

Bulb(s) Included?	Yes
Bulb 1 Type	Integral LED
Total LED, Bulb or Socket Count	1
Input Voltage	120VAC
Wattage	10
Initial Lumens	1040
Kelvin	3000K
CRI	90
Power Supply Type	Driver
Power Supply Quantity	1
Power Supply Location	Outlet Box
Dimming Type	TRIAC/ELV

Installation

Installation	Licensed electrician required
Installation Orientation	Vertical

Diffuser(s), Shade(s) and Lens(es)

Diffuser Type	Frosted White Polycarbonate
Lens Type	Dome Cap & Dome Lens

Shipping

Carton 1 L x W x H	9" X 10" X 9"
Carton 1 Gross Weight	4 LBS

General Listings

Color/Finish	Textured White (.98)
Features	Wet Rated
Certification	C-ETL-US
Dark Sky Friendly	N

Available Finishes

Available Finishes	Textured Bronze (.72), Textured Gray (.74), Textured White (.98)
--------------------	--

Available Color Temperatures

Available Color Temperatures	3000k
------------------------------	-------

Options In This Family

SKU	Size	Wattage	CRI	Delivered Lumens
7300.DC.DL.XX-WL		10	90	
7300.DC.FH.XX-WL		10	90	
7300.DC.FW.XX-WL		10	90	
7300.DC.PL.XX-WL		10	90	
7300.PC.DL.XX-WL		10	90	
7300.PC.FH.XX-WL		10	90	
7300.PC.FW.XX-WL		10	90	
7300.PC.PL.XX-WL		10	90	