

Project:


REALS Downlight LED Sconce Spec Sheet

SKU: 7300.DC.FW.72-WL

Consider the possibilities of the nearly unlimited opportunities to configure REALS sconces, with lenses and caps, for a variety of LED illuminating possibilities. Also available as a [Up/Down Sconce](#), [Surface Mount](#), [Bollard](#), and [Double Bollard](#).

Learn more: <https://sonnemanlight.com/realS-downlight-led-sconce>

Type #:

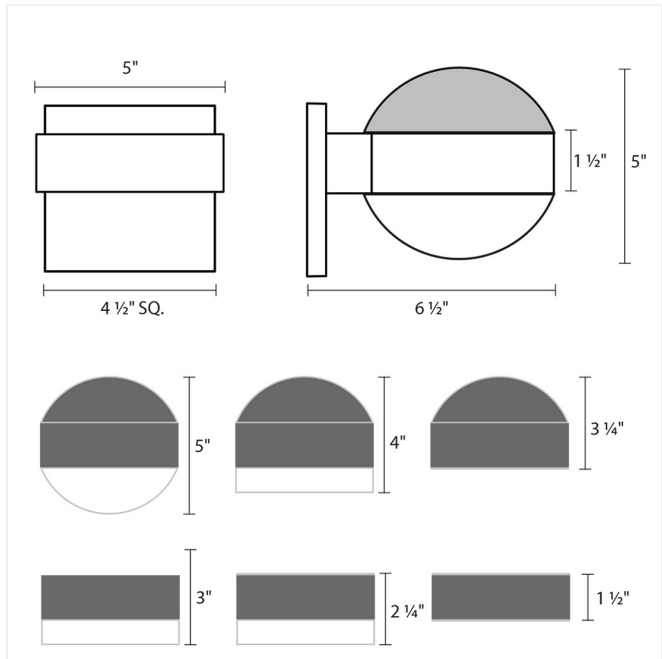

Dimensions

Height:	4"
Width:	5"
Extends:	6.5"
Minimum Extension:	6.5"
Maximum Extension:	6.5"
Canopy/Backplate/Base Width:	4.5"
Canopy/Backplate/Base Depth:	0.5"
Canopy/Backplate/Base Height:	4.5"

Electrical Specs

Bulb(s) Included?:	Yes
Bulb 1 Type:	Integral LED
Bulb Quantity:	1
Input Voltage:	120VAC
Wattage:	10
Initial Lumens:	1040
Kelvin:	3000K
CRI:	90
Power Supply Type:	Driver
Power Supply Quantity:	1
Power Supply Location:	Outlet Box
Dimming Type:	TRIAC/ELV
Bulb Max Wattage:	10

Installation

Installation:	Licensed electrician required
Installation Orientation:	Vertical

Shipping

Carton 1 L x W x H:	9" X 10" X 9"
Carton 1 Gross Weight:	4 LBS

Shade

Lens Type:	Dome Cap and White Cylinder Lens
Shade Material:	Frosted White Polycarbonate

General Listings

Features:	Wet Rated
Certification:	C-ETL-US
Color/Finish:	Textured Bronze (.72)
Dark Sky Friendly:	N

Available Finishes

Available Finishes:	Textured Bronze (.72), Textured Gray (.74), Textured White (.98)
---------------------	---

Available Color Temperatures

Available Color Temperatures:	3000k
-------------------------------	-------

Options In This Family

SKU	Size	Wattage	CRI	Delivered Lumens
7300.DC.DL.XX-WL		10	90	
7300.DC.FH.XX-WL		10	90	
7300.DC.FW.XX-WL		10	90	
7300.DC.PL.XX-WL		10	90	
7300.PC.DL.XX-WL		10	90	
7300.PC.FH.XX-WL		10	90	
7300.PC.FW.XX-WL		10	90	
7300.PC.PL.XX-WL		10	90	