


## Project:

## REALS Up/Down LED Sconce

SKU: 7302.FW.DL.98-WL

Consider the possibilities of the nearly unlimited opportunities to configure REALS sconces, with lenses and caps, for a variety of LED illuminating possibilities. Also available as a [Downlight Sconce](#), [Surface Mount, Bollard](#), and [Double Bollard](#).

Learn more: <https://sonnemanlight.com/reals-up-down-led-sconce>

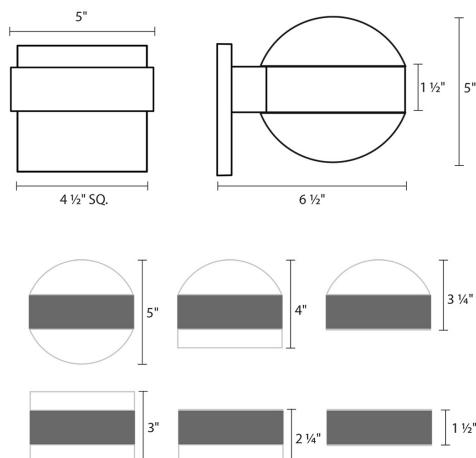

## Dimensions

Height	4"
Width	5"
Extends	6.5"
Minimum Extension	6.5"
Maximum Extension	6.5"
Canopy/Backplate/Base Width	4.5"
Canopy/Backplate/Base Depth	0.5"
Canopy/Backplate/Base Height	4.5"

## Electrical Specs

Bulb(s) Included?	Yes
Bulb 1 Type	Integral LED
Total LED, Bulb or Socket Count	2
Input Voltage	120VAC
Wattage	20
Initial Lumens	2080
Kelvin	3000K
CRI	90
Power Supply Type	Driver
Power Supply Quantity	1
Power Supply Location	Outlet Box
Dimming Type	TRIAC/ELV

## Installation

Installation	Licensed electrician required
Installation Orientation	Vertical

## Diffuser(s), Shade(s) and Lens(es)

Diffuser Type	Frosted White Polycarbonate
Diffuser 2 Type	Frosted White Polycarbonate
Lens Type	White Cylinder Lens and Dome Lens

## Shipping

Carton 1 L x W x H	9" X 10" X 9"
Carton 1 Gross Weight	5 LBS

## General Listings

Color/Finish	Textured White (.98)
Features	Wet Rated
Certification	C-ETL-US
Dark Sky Friendly	N

## Available Finishes

Available Finishes	Textured Bronze (.72), Textured Gray (.74), Textured White (.98)
--------------------	--

## Available Color Temperatures

Available Color  
Temperatures

3000k

