

Project:


Thin-Line Indirect LED Wall Bar Spec Sheet

SKU: 2814.25-8

One of our best selling families, Thin-Line is a system of minimally scaled LED indirect light wall bars, [uplight/downlight wall bars](#), and [pendants](#). Thin-Line is offered in a variety of lengths, finishes, and lighting configurations. Indirect configurations reflect light back onto the wall or mounting surface to radiate indirect illumination.

Learn more: <https://sonnemanlight.com/thin-line-indirect-led-wall-bar>

Type #:

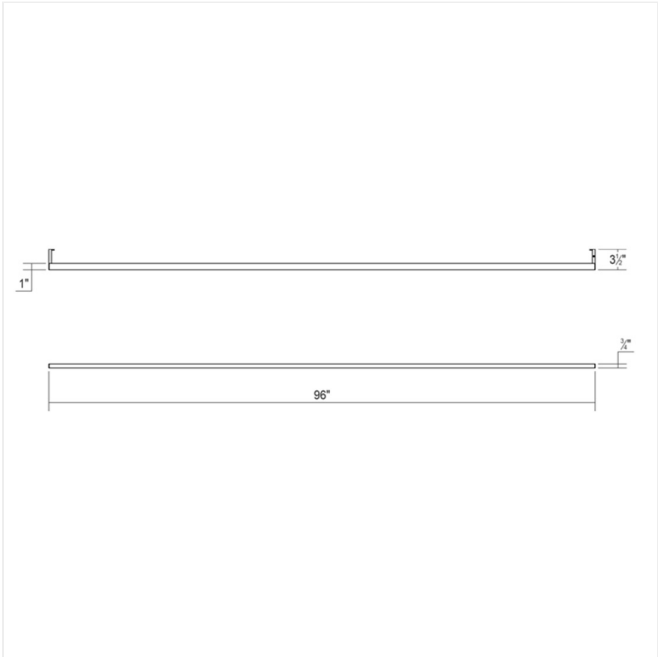

Dimensions

Height:	0.75"
Width:	96"
Extends:	3.5"
Minimum Extension:	3.5"
Maximum Extension:	3.5"
Size:	8'
Canopy/Backplate/Base Width:	1"
Canopy/Backplate/Base Height:	0.75"

Electrical Specs

Bulb(s) Included?:	Yes
Bulb 1 Type:	Integral LED
Bulb Quantity:	1
Input Voltage:	120VAC
Wattage:	47
Initial Lumens:	3120
Delivered Lumens:	1800
Kelvin:	3000K
CRI:	90
Power Supply Type:	Driver
Power Supply Quantity:	1
Power Supply Location:	Remote
Dimming Type:	TRIAC/ELV
Bulb Max Wattage:	47

Installation

Installation:	Licensed electrician required
Installation Orientation:	Any Orientation

Shipping

Carton 1 L x W x H:	99" X 7" X 4"
Carton 1 Gross Weight:	8 LBS

Shade

Shade Material:	Aluminum w/Optical Acrylic
-----------------	----------------------------

General Listings

Features:	At NYDC, Damp Rated
Certification:	C-ETL-US
Color/Finish:	Satin Black (.25)

Available Finishes

Available Finishes:	Bright Satin Aluminum (.16), Satin Black (.25), Satin White (.03)
---------------------	---

Available Color Temperatures

Available Color Temperatures:	2700K, 3000K, 3500K
-------------------------------	---------------------

Options In This Family

SKU	Size	Wattage	CRI	Delivered Lumens
2814.XX-3	3'	19	90	670
2814.XX-4	4'	22	90	900
2814.XX-4-27	4'	22	90	900
2814.XX-4-35	4'	22	90	900
2814.XX-6	6'	36	90	1350
2814.XX-8	8'	47	90	1800