

Project:


Light Guide Ring Spec Sheet

SKU: 2656.03A

Floating within an aluminum ring, an LED source edge-lights a light guide disk that redirects its luminance to its upper and lower surfaces, producing a glare-free radiance. Arranged in single and multiple configurations, Light Guide Ring offers exciting illuminating solutions to both larger and smaller environments. Also available as a [Sconce](#) and [Double Light Sconce](#).

Learn more: <https://sonnemanlight.com/light-guide-ring>

Type #:

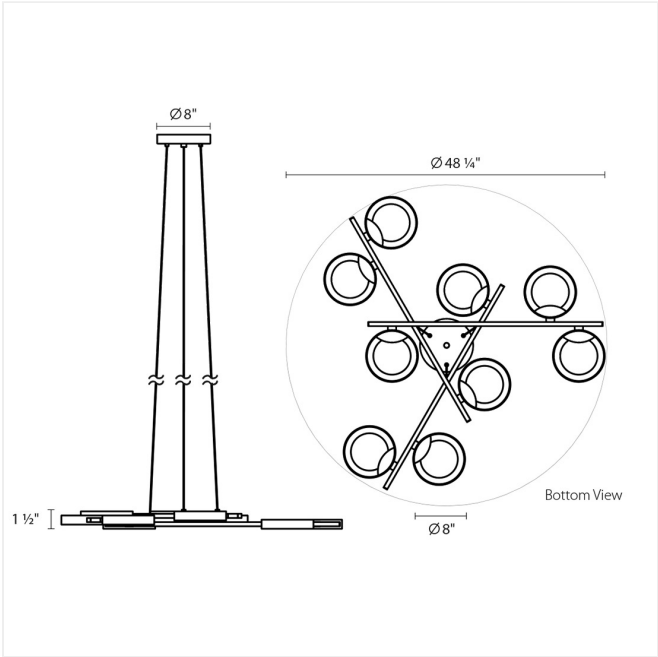

Dimensions

Height:	1.5"
Width:	18.5"
Length:	7.75"
Diameter:	48.25"
Canopy/Backplate/Base:	8"
Hanging Details:	6' Adjustable Cords
Size:	9-Light
Canopy/Backplate/Base Height:	1.5"

Electrical Specs

Bulb(s) Included?:	Yes
Bulb 1 Type:	Integral LED
Bulb Quantity:	9
Input Voltage:	120-277VAC
Wattage:	60
Initial Lumens:	5517
Kelvin:	3000K
CRI:	90
Power Supply Type:	Driver
Power Supply Quantity:	1
Power Supply Location:	Canopy
Dimming Type:	TRIAC & ELV @ 120V / 0-10V
Bulb Max Wattage:	60

Installation

Installation:	Licensed electrician required
Sloped Ceiling Compatible?:	Not Compatible
Minimum Hanging Height:	9"

Shipping

Carton 1 L x W x H:	50" X 55" X 5"
Carton 1 Gross Weight:	24 LBS

Shade

Shade Material:	Aluminum
Shade 2 Material:	Clear Acrylic

General Listings

Features:	Damp Rated
Certification:	C-ETL-US
Color/Finish:	Satin White w/Apricot Interior (.03A)

Available Finishes

Available Finishes:	Satin Black w/Apricot Interior, Satin Black w/White Interior, Satin White w/Apricot Interior, Satin White w/White Interior
---------------------	--

Available Color Temperatures

Available Color Temperatures:	3000k
-------------------------------	-------

Options In This Family

SKU	Size	Wattage	CRI	Delivered Lumens
2655.XXW	4-Light Bar	38	90	
2656.XXW	9-Light	60	90	
2656.XXA	9-Light	60	90	